


Communications & Power Industries Beverly Microwave Division Absorptive Limiter

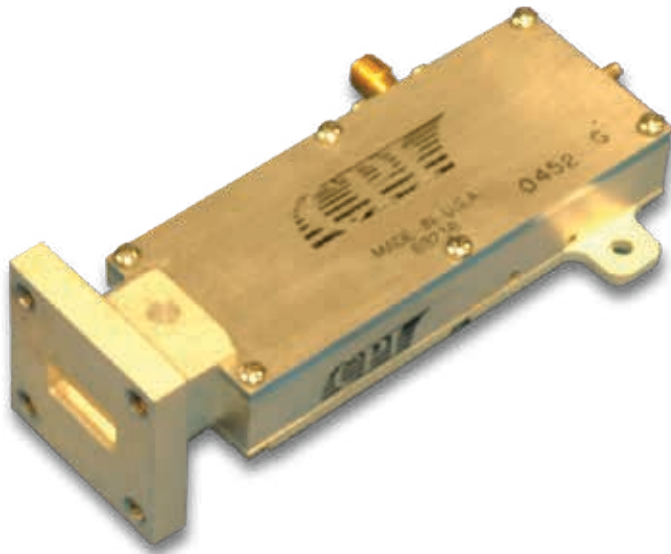

With a history of producing high quality products, we can help your with limiter.

Contact us at BMDMarketing@cpil.com
or at call us at +1 978-922-6000.

FEATURES:

- Frequency range: 14 – 18 GHz
- Pulsewidth: 10 μ S max
- RF Input power:
 - Normal operating: 50 W peak
 - Overload: 500 W peak
- Insertion loss: 1.3 dB max
- VSWR: 1.4:1 max
- Switched attenuation: 40 dB min
- Switching speed: 1 μ S max
- Passive limiter leakage:
 - Spike power: 100 mW max
 - Flat power: 50 mW max
- Recovery time: 500 nS max
- Input: WR62
- Output: 2.92 mm

BENEFITS:

- Broadband
- High power
- Wide pulsewidth

APPLICATIONS:

- Specification variations available for various market uses