

## CPI Electron Device Business - Klystron Transmitter



The CPI EDB high voltage power supply that provides 5 kW of DC energy to the solid state switch assembly. The high voltage power supply (HVPS) is a 19 inch rack mount unit, 8 inches high by 21.5 inches deep. It is completely self-protected with over-current and input under/over voltage circuits. The HVPS converts the prime power input AC into DC then switches it utilizing a short-circuit proof series resonant inverter. Auxiliary power supplies needed to operate the klystron are contained in this unit, including a filament power source, lon pump source, and low voltage bias supplies. The external interface and control is done in this supply. Cooling is accomplished by internal fans.

The CPI EDB 250 kW, C-band, klystron transmitter components for weather radar are available for constructing a complete microwave transmitter. This microwave transmitter uses a CPI EDB klystron amplifier (VKC8387) as the final RF output device. CPI EDB is able to furnish a compact, user-friendly, cost-effective microwave power source with excellent pulsed Doppler capability. The transmitter controller offers Ethernet connectivity for the user and OEM.

The transmitter that CPI EDB provides includes the high voltage power supply, Solenoid power supply, Solenoid for the klystron, 250 kW C-band klystron, solid state switch and the high voltage oil tank assembly which includes the pulse transformer, energy storage high voltage capacitor, filament power supply. CPI EDB has integrated these components into the transmitter cabinet.

### FEATURES:


- 250 kW peak power RF output
- Modular design for ease of customization
- Air cooled

### BENEFITS:

- CPI EDB Klystrons and modulators ensure compatible performance
- Easy to use and user friendly
- Built in diagnostics and BIT for local or remote troubleshooting.

### APPLICATIONS:

- Weather radars
- Instrumentation radars

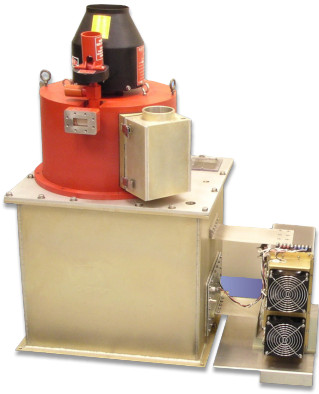

All high voltage is contained in an oil tank. The Pulse Transformer that steps up the HVPS output to the high voltage that the Klystron requires, the storage capacitor to supply the energy

during the pulse for good RF pulse fidelity, and the Klystron filament DC filter are all contained in this oil tank. The Solenoid and the Klystron are mounted on the top of the oil tank with the bushing of the Klystron going into the oil tank and immersed in the oil. External fans are required to cool the klystron and the solenoid. The fans are interlocked as the Klystron and Solenoid can be damaged if sufficient cooling is not supplied.

The Solid-State Switch Assembly is located close to the High Voltage Oil Tank Assembly so that there is minimal inductance in the buss-line that is carrying the current to the Step-up Transformer. Beam switching is done by a solid-state array of IGBT switch boards that is driven by the control interface board in the HVPS. The IGBT switch is a current controlled switch, set by a bias voltage from the HVPS control interface board. The voltage across the switch will change automatically as the voltage across the klystron changes due to frequency and temperature changes. This switch will also inherently limit arc current in the event of a klystron HV arc. The limit is less than twice the normal operating current in the event of a complete short circuit. The modulator switch assembly has integral fans to cool the switches.

The COTS solenoid power supply is a separate 19 inch rack power supply that is (3U) 5.25 inches high by 21.5 inches deep. The solenoid power supply is current controlled because the voltage to the coil will change as the temperature of the solenoid coil changes.

## Instrumentation and control

The transmitter controller offers Ethernet connectivity for the user and OEM. (RS422 is available as an option) BITE, status information and operating parameters are also available to the radar operator for remote monitoring of the equipment. At the front panel of the transmitter five (5) test points are available. These are RF input sample, RF output forward power sample, RF output reflected power sample, RF gate pulse sample and the modulator gate pulse sample.

In addition to prime power and control signals via the Ethernet line to the transmitter the radar system controller must provide a +10V gate signal to the CPI EDB transmitter that determines the duration the IGBT switch is on (which determines the duration of the klystron beam pulse and the PRF). If the exciter is CW then the system controller also needs to provide an RF gate signal to the transmitter for nesting the RF pulse within the klystron beam pulse.

## Cabinetry

The transmitter outline is approximately 50 inches wide by 38 inches deep by 70 inches tall (including mounting feet or casters). The waveguide is designed to exit at the top of the cabinet. Weight is approx. 1,200 lbs.

The transmitter subassemblies are designed to fit into standard cabinets. The HV tank and IGBT switch are located next to each other due to the necessity of minimizing inductance between the two assemblies The HVPS and Solenoid power supply and klystron are located in the cabinet enclosure and due to their weight a special mounting of these is available to enable easy removal of the klystron for maintenance and troubleshooting.

# CPI EDB C-Band Klystron Transmitter: VPC3467P

The transmitter cabinet is exchanging cooling air to remove 5KW of power and keep the internal temperature under 40° C. The enclosure air is filtered so debris will not get to any high voltage areas. These filters need to be changed periodically based on the amount of debris in the area.

## Fault Protection

Monitor and shut off triggers for:

- Peak and average cathode current
- Filament power supply regulation and current
- Excessive duty cycle from gate signal
- Solenoid current fault
- Ion power supply current
- High voltage under voltage and over current
- Low voltage power supply under voltage
- HVPS and Modulator
- Tank oil level window

With a history of producing high quality products, we can help you with your klystron transmitter. Contact us at [ElectronDevices@cpi-edb.com](mailto:ElectronDevices@cpi-edb.com) or call us at +1 978-922-6000.

SPECIFICATION	DESCRIPTION	COMMENTS
Modulator Type	Solid state, cathode pulsed	IGBT switch modulator, current controlled
Dimensions	50"W X 38"D X 70"H	
Input voltage	208vac 3phase, 50/60hz, +/-5%	0.85 power factor minimum
RF Output power	250 kW peak	
Frequency	5.6 - 5.65 GHz	Fixed bandwidth
Gain	60dB	Nominal
Coherency	55dB	Dependent on coherency of RF drive, equal to an RMS phase error of approximately 0.1°rms
Pulse widths	In response to input gate - Adjustable from 0.5 to 5.0us	The PW is continuously variable based on input gate.
PRF	Minimum: 250 Hz Maximum: 2126 Hz	The PRF is continuously variable based on input gate.
Duty cycle	0.0022	RF duty, (Beam duty 0.0033)



**Beverly Microwave Division**  
150 Sohier Road  
Beverly, Massachusetts  
USA 01915

tel +1 978-922-6000  
email [ElectronDevices@cpi-edb.com](mailto:ElectronDevices@cpi-edb.com)  
fax +1 978-922-8914  
web [www.cpi-edb.com](http://www.cpi-edb.com)

For more detailed information, please refer to the corresponding CPI EDB technical description if one has been published, or contact CPI EDB. Specifications may change without notice as a result of additional data or product refinement. Please contact CPI EDB before using this information for system design.

©2024 CPI Electron Device Business. Company proprietary; use and reproduction is strictly prohibited without written authorization from CPI EDB.