
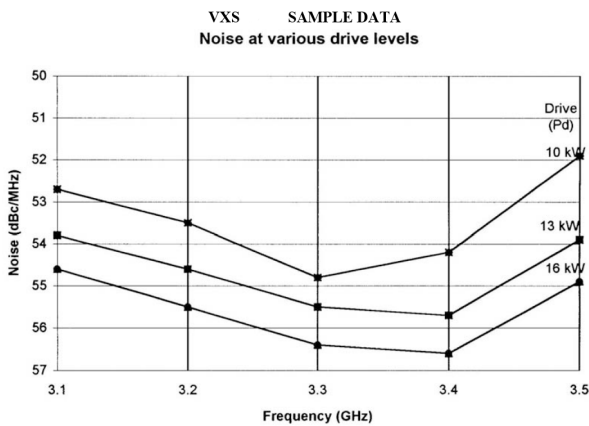


CPI Electron Device Business - Crossed-Field Amplifier

With a history of producing high quality products, we can help you with your CFA.

Contact us at ElectronDevices@cpiedb.com or at call us at +1 978-922-6000.

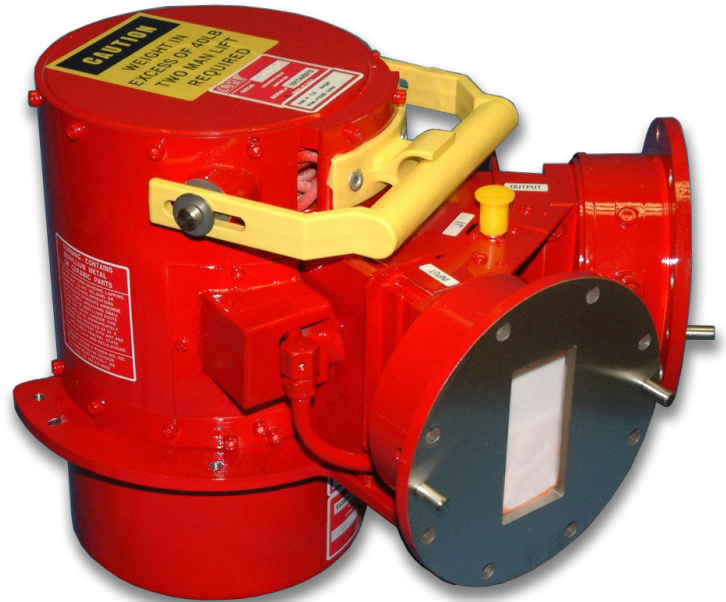

FEATURES:


- Frequency: 3.1 - 3.5 GHz
- Peak power: 220 kW
- Duty cycle: 0.02
- Pulswidth: 50 μ Sec
- Anode voltage 16 kV
- Anode current 36 A

BENEFITS:

- High peak power
- Low noise

APPLICATIONS:

- Ground based radar

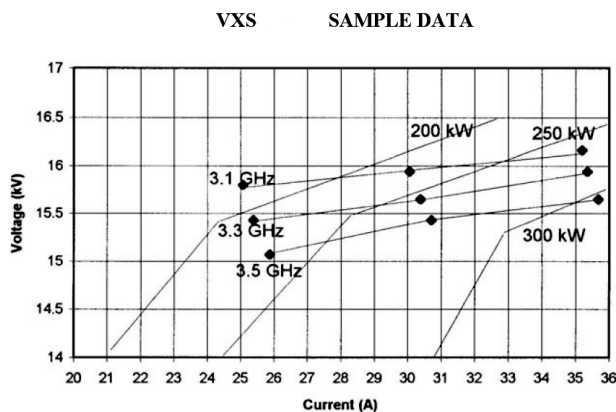

Beverly Microwave Division
150 Sohier Road
Beverly, Massachusetts
USA 01915

tel +1 978-922-6000
email ElectronDevices@cpiedb.com
fax +1 978-922-8914
web www.cpi-edb.com

For more detailed information, please refer to the corresponding CPI EDB technical description if one has been published, or contact CPI EDB. Specifications may change without notice as a result of additional data or product refinement. Please contact CPI EDB before using this information for system design.

©2024 CPI Electron Device Business. Company proprietary: use and reproduction is strictly prohibited without written authorization from CPI EDB.