



Electron Device
Business

Air Traffic & Surveillance Radar Products

Key for efficient and safe
commercial and military aviation



HIGH-POWER VED TRANSMITTERS

S-Band
C-Band

SOLID-STATE GaN POWER AMPLIFIERS

S-Band
X-Band

MAGNETRONS

L-Band Ku-Band
S-Band Ka-Band
X-Band

RECEIVER PROTECTORS & LIMITERS

S-Band Ku-Band
X-Band Ka-Band



Electron Device
Business

Radar Products For Air Traffic and Surveillance

S-, C-Band High-Power Transmitters

- Transmitter cabinet with 50/70 kW peak output power
- Frequency range: 2.75/5.4 GHz to 3.05/5.9 GHz



S-Band GaN High-Power Transmitters

- Transmitter cabinet with 12 kW minimum peak output power
- Soft fail by virtue of power combining
- Full redundancy
- >160 dB of power attenuation available
- Designed for ATC shelter applications




S-Band GaN High-Power SSPAs

- 1.3 kW pulsed modules that can be power combined for higher peak power output
- Internal processor with BIT monitoring
- Self protecting



X-Band GaN High-Power SSPAs

- Frequency range: 9.0 to 10.0 GHz
- BIT and controls via EIA-422 remote
- 1 kW and 1.8 kW pulsed modules at 10% duty
- Up to 12 kW when power combined

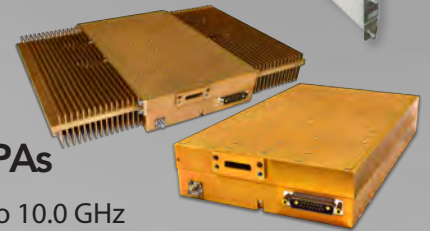

Key features of air traffic and surveillance radar products

- BIT and controls via EIA-422 remote connection
- Built-in VSWR protection
- Compliant to NTIA regulatory requirements
- Provide high gain
- Excellent pulse fidelity with low AM/PM, phase-noise and spectral regrowth performance
- Easy to maintain

Check out
all our air traffic
and surveillance
radar products at
www.cpi-edb.com

Reliability and Innovation



Check out all CPI EDB weather radar products at www.cpi-edb.com



Klystron Weather Radar Transmitters

- S-, C-, and X-Band transmitters
- Excellent stability and performance
- Tunable
- Up to 1 MW peak output power
- Forced-air cooled
- Touch screen with local/remote control
- Ethernet connectivity for remote monitoring and control

Magnetron Weather Radar Transmitters

- S-, C-, and X-Band transmitters
- Sheltered or outdoor models
- Forced-air cooled
- Touch screen with local/remote control
- Ethernet connectivity for remote monitoring and control
- Excellent Doppler performance
- Mechanically tunable frequency

With our experience and product breadth, we can support most new and existing weather radar systems.

CPI EDB is uniquely positioned to deliver either individual microwave components or complete transmitters, based on each customer's needs. Each transmitter provides a wide range of output power options along with custom user interfaces and remote networking capability.



Air Traffic and Surveillance Radar Products

With a history of producing high-power, high quality products, we can help you with your ATC radar products.

Contact us at ElectronDevices@cpi-edb.com or at call us at +1 978-922-6000

Magnetrons

Typical Operating Parameters

Band	Frequency (GHz)	Peak Power	Duty Cycle
L	1 - 2	1 MW	Various
S	2.7 - 2.9	800 kW	Various
X	8.5 - 9.6	250 kW	Various
Ku	15.6 - 16.7	40 kW	Various
Ka	32.9 - 33.5	60 kW	Various

Transmitters

Typical Operating Parameters

Band	Frequency (GHz)	Average Power
S	2.75 - 3.05	Up to 50 kW
C	5.4 - 5.9	Up to 70 kW

Solid State GaN Power Amplifiers

Typical Operating Parameters

Band	Frequency (GHz)	Peak Power (KW)	Duty Cycle
S	2.7 - 3.7	1.3	10%
X	9.0 - 10.0	1.0	10%

Receiver Protectors and Limiters

Typical Operating Parameters

Band	Peak Power	Average Power	Insertion loss	Recovery Time	Flat Leak	Spike Leak
S	Up to 1.25 MW	Up to 10 kW	< 0.8 dB	<1 μs	< 50 mW	< 250 mW
X	Up to 300 kW	Up to 300 kW	< 1.0 dB	<1 μs	< 50 mW	< 250 mW
Ku	Up to 300 kW	Up to 300 kW	< 1.0 dB	<1 μs	< 50 mW	< 250 mW
Ka	Up to 300 kW	Up to 300 kW	< 1.0 dB	<1 μs	< 50 mW	< 250 mW



cpi-edb.com



Beverly Microwave Division
150 Sohier Road
Beverly, Massachusetts
USA 01915

TMD Technologies Division
Swallowfield Way
Hayes, Middlesex
UK UB3 1DQ

For more detailed information, please refer to the corresponding CPI EDB technical description if one has been published, or contact CPI EDB. Specifications may change without notice as a result of additional data or product refinement. Please contact CPI EDB before using this information for system design.

©2024 CPI Electron Device Business. Company proprietary: use and reproduction is strictly prohibited without written authorization from CPI EDB.