



Solid State Waveguide Limiters

CPI Electron Device Business - Waveguide Limiters

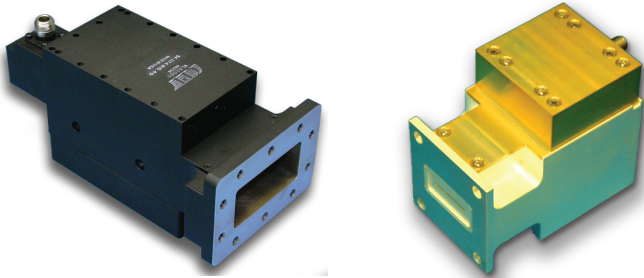

With a history of producing high quality products, we can help your with waveguide limiters.

Contact us at ElectronDevices@cpi-edb.com or at call us at +1 978-922-6000.

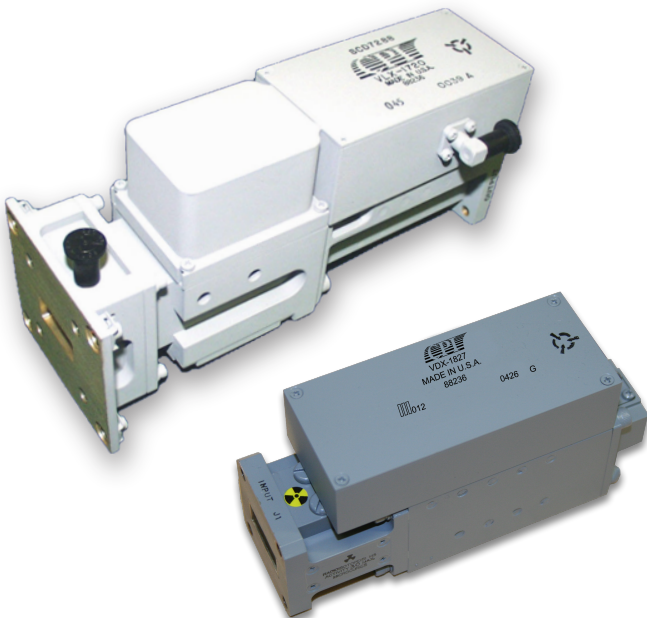

FEATURES:

- Variable attenuation
- Excess noise generation
- Filtering
- Coupling
- Waveguide to coax transitions

BENEFITS:

- High power handling
- Low leakage

APPLICATIONS:

- Specification variations available for various market uses

Typical Operating Parameters

Frequency	S- Band	C- Band	X- Band	Ku-Band	Ka -Band
Peak Power Handling	10 kW	5 kW	2 kW	1 kW	100 W
Average Power Handling	10 W	5 W	2 W	1 W	1 W
Pulse Width	10 ms	10 ms	1 ms	1 ms	1 ms
Insertion Loss	0.5 dB	0.7 dB	1.0 dB	1.5 dB	2.0 dB
Flat Leakage	50 mW	50 mW	50 mW	50 mW	100 mW
Spike Leakage	100 mW	100 mW	100 mW	100 mW	500 mW
Recovery Time	1 ms	1 ms	1 ms	0.5 ms	0.5 ms



Beverly Microwave Division
150 Sohler Road
Beverly, Massachusetts
USA 01915

tel +1 978-922-6000
email ElectronDevices@cpi-edb.com
fax +1 978-922-8914
web www.cpi-edb.com

For more detailed information, please refer to the corresponding CPI EDB technical description if one has been published, or contact CPI EDB. Specifications may change without notice as a result of additional data or product refinement. Please contact CPI EDB before using this information for system design.

©2025 CPI Electron Device Business. Company proprietary: use and reproduction is strictly prohibited without written authorization from CPI EDB.